

Advantages


- PS Convex with De-Glaring Prism
- State of the art performance.
- Available in 3050mm length.
- Good value for Money

Ingemann Deglaring Prism is an excellent choice for a broad range of luminaire solutions such as office areas, for pendants, and continued linear luminaires.

This microprism offers a highly innovative De-Glaring function with excellent UGR compression. Available in 1,5mm and (1,2mm on request) thickness and in length up to 3050mm.

Product data

Pattern	Prismatic
Material	PS
Thickness	1,5mm +/- 0,1mm (1,2mm on quest)
Transmission	92%
Density	1,05 g/cm³
Standard dimensions	3050x1220mm
Tensile Strength	420 MPA
Heat Distortion Temperature	88 C°
Operating temperatur	Max. 60 C° Min. -20C°

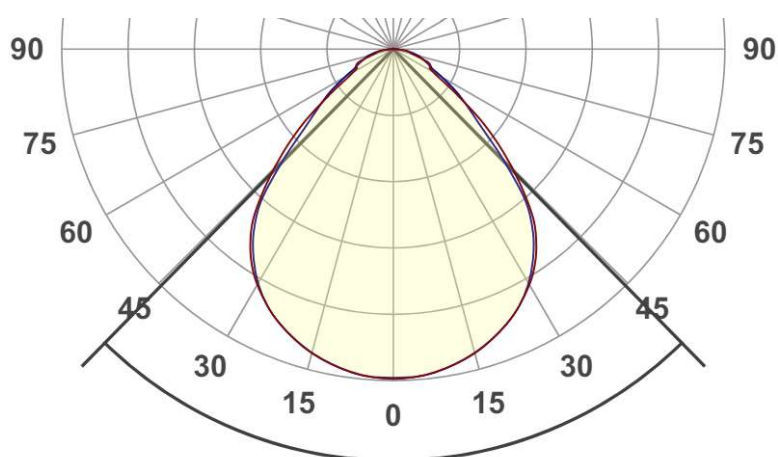

Measured light distribution curve, temiluxID Pure

■ C0/C180

■ C90/C270

* Datasheet is made on behalf of producer's information. Ingemann Components A/S cannot guarantee the authenticity of the data.

CONTACT US

For inquiries, feel free to contact us at: +45 46186644 or sales@ingemanncomponents.com