



Advantages


- Excellent thickness uniformity
- High haze
- Good optical transmittance
- Cost-efficient solution

I-Fusion L1 is a high-performing and cost-efficient solution. It diffuses light efficiently, uniformly and allows for even brightness all over the LCD backlit unit and LED lighting system.

The thickness and length of the diffusor, which comes in continuous rolls, make it suitable for long applications. Additionally, the anti-static treatment prevents dirt depreciation and make it easy to handle.

Product data

Material	PET
Standard dimensions	1250mm x continous roll
Thickness	0,21mm
Haze	95,3%
Transmittance	73%
Temperature range	-20°C to +85°C

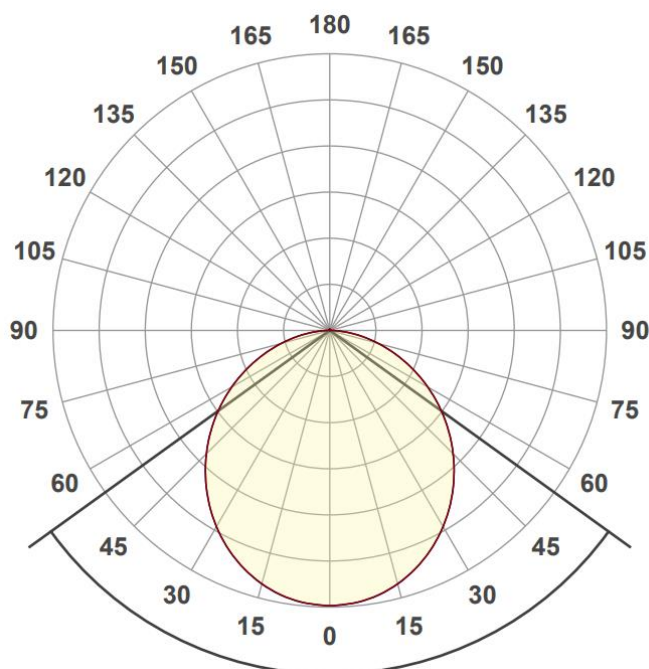

Measured light distribution curve, PET I-Fusion L1

■ C0/C180 ■ C90/C270

* Datasheet is made on behalf of producer's information. Ingemann Components A/S cannot guarantee the authenticity of the data.

CONTACT US

For inquiries, feel free to contact us at: +45 46186644 or sales@ingemanncomponents.com

Technical specifications

Properties	209±3% µm
Physical	
Density	1,38g/cm3
Pencil Hardness	4H for front side, H for backside
Optical	
Transmittance	73±3%
Haze	95,3±3%
Mechanical	
Tensile strength	150MPa
Thermal	
Long term temperature	-20°C to 85°C
Surface	Structured on one side and glossy on the other
UV stable	Yes
Dirt depreciation	Anti-static treatment
Chemical resistance, PET	See next page
Thermal expansion	$7 \cdot 10^{-5}/K^{-1}$
Glow wire test IEC 60695-2-12	None
Fire rating	None

Chemical resistances - PET

Chemical resistances at 20°C			
Acetone	-	Ethyl acetate	-
Ammonia	-	Glycerin	+
Amyl alcohol	o	Fuel oil	+
Benzene, free from aromatics	-	Hexane	+
Benzole	N/A	Isopropanol	N/A
Boric acid	N/A	Coffee	+
Butanol	+	Caustic potash solution	N/A
Chlorinated hydro-carbon	N/A	Ketone	-
Chloroform	-	Methylene chloride	-
Chlorinated water/air	N/A	Lactic acid 10%	N/A
Dibutyl phthalate	+	Mineral oil	+
Diocetyl phthalate	N/A	Caustic soda	N/A
Glacial acetic acid	N/A	Nitrocellulose lacquer	N/A
Acetic essence	-	Oxalic acid	+
Aqueous acetic acid	-	Wax	+
Ethanol	+	Hydrogen peroxide	+
Acidity of wine	+	Hydrochloric acid conc. 35%	-
Xylene	+	Sodium carbonate	+
Paraffin	+	Salad vinegar	+
Petroleum ether	+	Stearic acid	+
Phosphoric acid 10%	o	Tea	+
Sulphuric acid 10%	o	Turpentine	+
Nitric acid 10%	o	Toluene	+
Hydrochlorid 10%	o	Potassium Hydroxide	-

+ Resistant
 o Limited resistance
 - Not resistant
 N/A Not available