


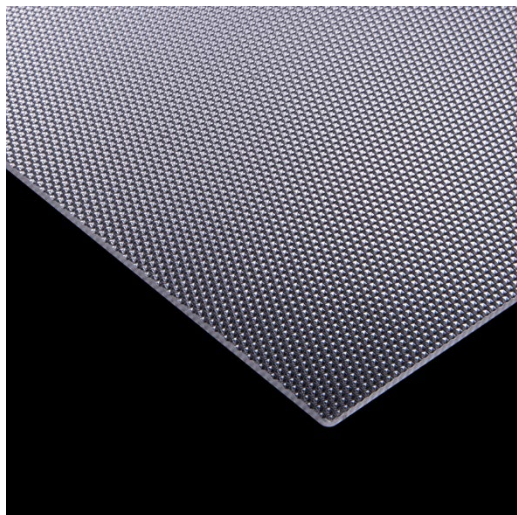


Advantages

- Available in PMMA
- Suitable for edgelighting
- Concave hexagon structure

The **Ingemann C-Prism** is a reverse microprism that improves the light distribution with an excellent and homogeneous glare suppression. It ensures a homogeneous look in combinations with a diffuser. It is an excellent choice for applications that require $UGR < 19$ and is ideal in office areas, for pendants, signages and continued linear luminaires.

Product data

Material	PMMA
Thickness	1,5 mm 2,0 mm 2,5 mm
Pyramid width	1,6 mm
Refractive index	1,49
Transmittance	92%
Standard dimensions	1550x1250mm
Temperature range	-40C/+80C
Glow wire test conducted	Yes
Build-up	One-plate solution

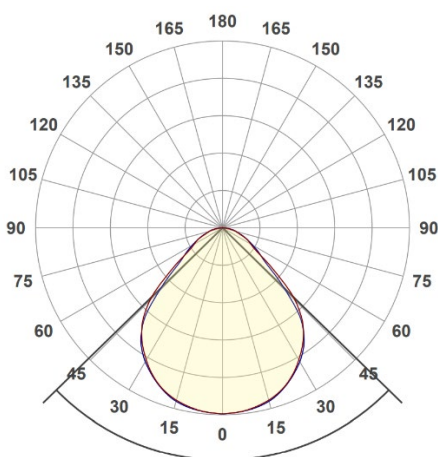

Measured light distribution curve, Ingemann C-Prism ■ C0/C180 ■ C90/C270

* Datasheet is made on behalf of producer's information. Ingemann Components A/S cannot guarantee the authenticity of the data.

CONTACT US

For inquiries, feel free to contact us at: +45 46186644 or sales@ingemanncomponents.com

A LEDiL Group company