


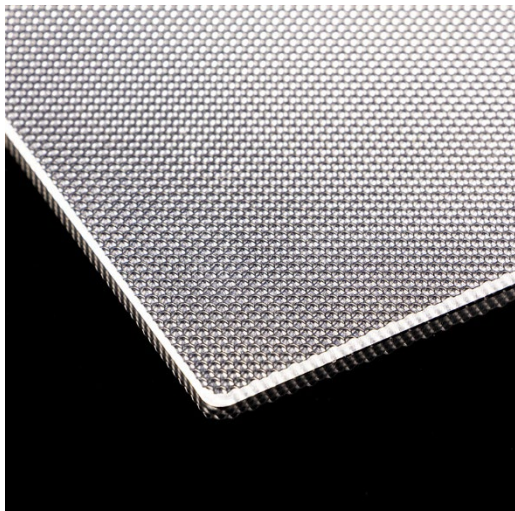


Advantages

- Best in class microprism
- 3 meter lengths
- High Light Transmission

Ingemann Deglaring Prism, IDP is the latest addition to our deglaring portfolio. This precision optic efficiently lowers UGR for backlit and edge lit luminaires helping you to fulfill EN12464. The prism is produced via extrusion giving a consistent Quality and good thickness tolerances. It is available in different thicknesses and sheet sizes up to 3 meter lengths.

Product data

Pattern	Prismatic
Material	PS
Thickness	1,5 mm +/- 0,1 mm (1,2 mm on request)
Transmission D ₆₅	92%
Standard dimensions	3050 x 1220 mm
Tensile Strength	420 MPA
Density	1.05 g/cm ³
Operating temperature	-20 to 60°C
Heat Distortion Temperature	88°C

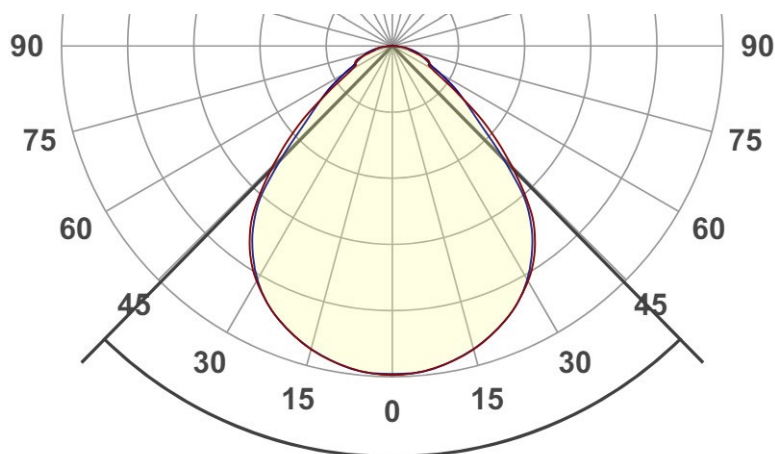

Measured light distribution curve, Ingemann IDP

*Datasheet is made on behalf of producer's information. Ingemann Components A/S cannot guarantee the authenticity of the data.

CONTACT US

For inquiries, feel free to contact us at: +45 46186644 or sales@ingemanncomponents.com

A LEDiL Group company